



## Technical Data Sheet

**U-EDGE (PATENT PENDING)** Tile Support at a wall edge

### COMPONENTS

The U-EDGE is composed of 1 piece


### CHARACTERISTICS

Weight: **0,086 kg**  
 Additional height: **12 mm**  
 Space between the wall and the tile: **5mm**




### MATERIAL

Copolymer polypropylene (CPP)  
 Composition: +/- 80% first grade pre-selected recycled PPC, and +/- 20% Talc + Masterbatch black  
 Designed and manufactured in Europe  
 Use of recycled materials exclusively of EU origin  
 Resistant to weathering, sea salts, algae and a wide range of chemicals  
 Temperature range: -30 °C to +80 °C

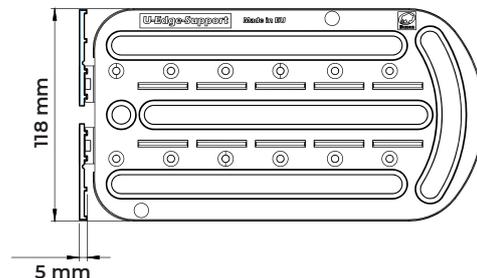

### PACKAGING

Pieces per carton: **24 pcs**  
 Carton weight: **2,28 kg**  
 Carton dimension: **300 x 250 x 155 mm**  
 Cartons per pallet: **208 pcs**  
 Pieces per pallet: **4992 pcs**  
 Pallet dimensions: **100 x 120 x 220 cm**



### APPLICATIONS

To accommodate small pieces of tiles and multiple angles at a wall edge

Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal grating panels.

### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

