



## Technical Data Sheet

**U-TOP-FLEX** - Head for specific tile shape

### COMPONENTS


The **U-TOP-FLEX** is composed of 1 piece.

### CHARACTERISTICS

Diameter: **ø 175 mm**

Weight: **97 gr**

Additional height: **14 mm**

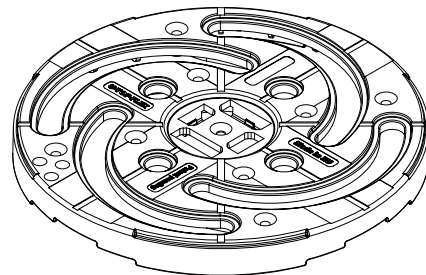

### MATERIAL

Copolymer polypropylene (CPP)


Composition: **+/- 80%** first grade pre-selected recycled PPC, and **+/- 20%** Talc + Masterbatch black

Designed and manufactured in Europe.

Use of recycled materials exclusively of EU origin.

Resistant to weathering, sea salts, algae and a wide range of chemicals.

Temperature range: **-30 °C to +80 °C**.

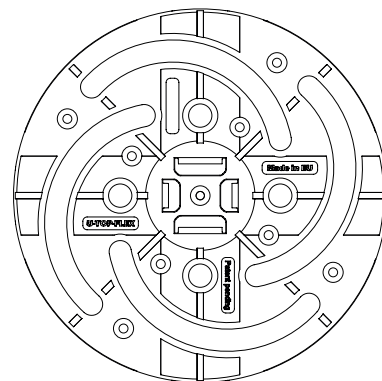

### PACKAGING


Pieces per carton: **48 pcs**

Carton weight: **5.17 kg**

Cartons per pallet: **80 pcs**

Pieces per pallet: **3840 pcs**

Pallet dimensions: **100 x 120 cm**

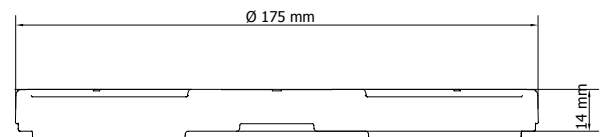

### APPLICATIONS

The modular head (U-TOP-FLEX) is a plate that can be attached to the pedestal to lay tiles of a specific shape. For example, hexagonal or triangular tiles. This gives maximum freedom for creativity.

- Can be fixed to the pedestal head, without tools, thanks to the PB-KIT-8 fixation (for PB pedestals) or PB-KIT-8-S fixation (for PB-S pedestals).
- The spacer tabs (U-TABS) press and clip, and then slide in the slots. They can be positioned to accommodate square or rectangular pavers, as well as any angled or curvilinear shaped-paver.

### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.

