



## Technical Data Sheet-PB

**PB-00 Height 15mm**

### COMPONENTS

The PB-00 is composed of one piece

### CHARACTERISTICS

Top:  $\varnothing$  170 mm, 227 cm<sup>2</sup>

Base:  $\varnothing$  197 mm, 305 cm<sup>2</sup>

Weight: 142 gr

Non Adjustable

With addition of a 0 to 5% U-PH5 slope corrector, height of 29 mm

### MATERIAL




Copolymer polypropylene (CPP) made from 95% recycled plastics

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: -30°C to +80°C

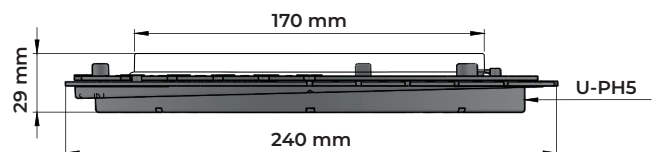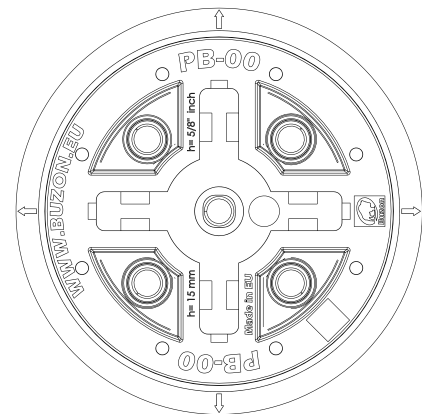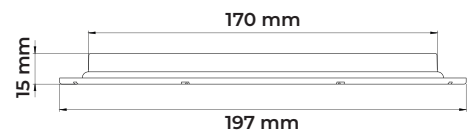

### PACKAGING

Pieces per carton: 24 pcs

Carton weight: 3,81 Kg

Carton dimension: 420 x 220 x 175 mm

Cartons per pallet: 120 pcs

Pieces per pallet: 2880 pcs

Pallet dimensions: 100 x 120 x 213 cm

APPLICATIONS

Buzon pedestals can be used for a wide range of outdoor applications, such as terraces, pool decks and water features, in landscape areas and on rooftops... Finishing materials can be freely specified by the designer. Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal grating panels. Buzon pedestals can be installed on a wide range of solid and stable substrates, such as concrete slabs, cement screeds, waterproof membranes, insulation panels.

Batten Holder



Aluminium Rail Holder



Spacer Tabs



Height:  
17 mm

Thickness:  
2, 3 and 4,5mm

Shims



U-E10 (T- 1mm)  
U-E20 (T- 2mm)

COMPRESSION TEST\*

Performed on the full (1/1), half (1/2) and quarter (1/4) surface of the head (1kN= 100kg /F= 224,8 lbf)

Position	Height ( mm )	Breaking load ( kN )	Breaking load ( lbf )
1/1	15	54,01 (5 401 kg)	12 153
1/2 **	15	30,81 (3 081 kg)	6 934
1/4 **	15	16,98 (1 698 kg)	3 820

\* Tests carried out by SIRRIS at 23°/50%  
\*\* Maximum load per pedestal : refer to value 1/1

- \*\* Safety recommendation for use of Buzon Pedestals System :**
- 1. Areas reserved for pedestrian access: divide the load indicated in the table by 2 with an additional safety factor of -15%.
  - 2. Areas reserved for industrial and technical applications: divide the load indicated in the table by 4 with an additional safety factor of -15%.

SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

