



Technical Data Sheet

U-EDGE (PATENT PENDING) Tile Support at a wall edge

COMPONENTS

The U-EDGE is composed of 1 piece

CHARACTERISTICS

Weight: **0,086 kg**

Additional height: **12 mm**

Space between the wall and the tile: **5mm**

MATERIAL

Copolymer polypropylene (CPP)



Composition: **+/- 80%** first grade pre-selected recycled PPC, and **+/- 20%** Talc + Masterbatch black

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: **-30 °C to +80 °C**

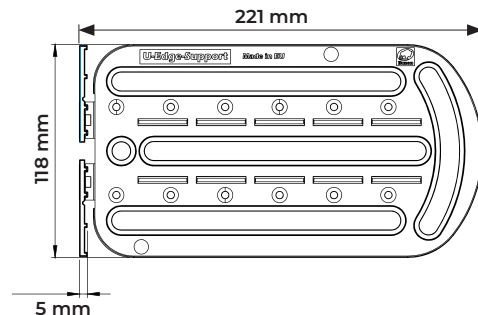

PACKAGING

Pieces per carton: **24 pcs**

Carton weight: **2,28 kg**

Carton dimension: **300 x 250 x 155 mm**

Cartons per pallet: **208 pcs**

Pieces per pallet: **4992 pcs**

Pallet dimensions: **100 x 120 x 220 cm**

APPLICATIONS

To accommodate small pieces of tiles and multiple angles at a wall edge

Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal grating panels.

SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This technical data sheet is for descriptive purpose only and is based on the product as on the date of publication of this information.

BPI 2025 © Copyright Buzon Pedestal International SA.

