



Technical Data Sheet

U-PAD-GROUND-3MM Protection layer

COMPONENTS

The U-PAD-GROUND-3MM is composed of 1 piece.

CHARACTERISTICS

Thickness of the pads: **3 mm**

Dimensions: **200 x 200 x 3 mm**

Weight: 0,072 kg

Weight/ m²: 2,18 kg/ m²


Material: **Coated PU rubber granulate**

Tension under pressure: **0,55 N/mm² (55 T/m²)** for a deformation of 25 %
(following DIN EN ISO 3386/2)

Building material class: E following EN 13501-1

Plasticizer migration: When laying on membranes that are not compatible with rubber, there is a risk of migration of plasticizers

Temperature range: **-40 °C to 120 °C**

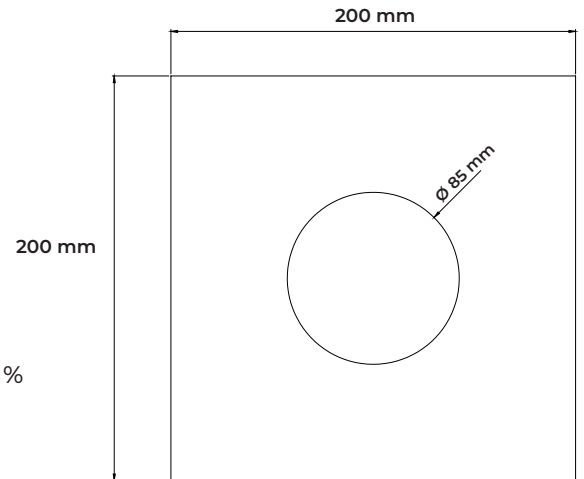


PACKAGING

Pieces per carton: **24 pcs**

Carton weight: **1,72 kg**

Carton dimension: **400 x 200 x 40 mm**



APPLICATIONS

The **U-PAD Ground** and the **U-TABS FLAT** form a combination of products.

The combination of accessories help to build terraces when the height available under the paver is limited between 3 and 17 mm. The system guarantees a flat terrace with a good distribution of the laying surface.

SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.