



Technical Data Sheet

U-TABS-SPIKE-3MM Spacer tabs

COMPONENTS

The U-TABS-SPIKE-3MM is composed of 1 piece.

CHARACTERISTICS

Weight: 0,17 kg

Height: 17 mm

Height of the spike: 50 mm

MATERIAL

Copolymer polypropylene (CPP)



Composition: +/- 80% first grade pre-selected recycled PPC, and +/- 20% Talc + Masterbatch black

Designed and manufactured in Europe.

Use of recycled materials exclusively of EU origin.

Resistant to weathering, sea salts, algae and a wide range of chemicals.

Temperature range: -30 °C to +80 °C

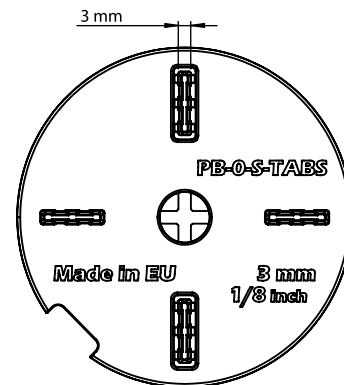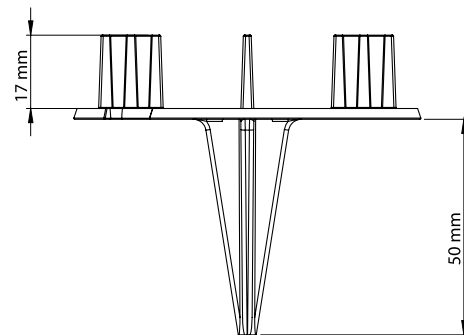

PACKAGING

Pieces per carton: 120 pcs

Carton weight: 2,54 kg

Carton dimension: 400 x 300 x 225 mm

Cartons per pallet: 90 pcs

Pieces per pallet: 10800 pcs

Pallet dimensions: 100 x 120 x 220 cm

APPLICATIONS

The U-TABS SPIKE enables the direct laying of pavers on soft ground, gravel, lawn, etc. It is planted directly in the ground and facilitates the creation of terraces or Japanese steps.

SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This technical data sheet is for descriptive purpose only and is based on the product as on the date of publication of this information.

BPI 2025 © Copyright Buzon Pedestal International SA.

