



## Technical Data Sheet

### U-WALL-POM (PATENT PENDING) Spacer at a wall edge

#### COMPONENTS

The U-WALL-POM is composed of 1 piece.

#### CHARACTERISTICS

Weight: **0,040 kg**

Additional height: **3 mm**

To be used only with 6mm tabs (maximum).

#### MATERIAL

POM 100%

Designed and manufactured in Europe.

Resistant to weathering and a wide range of chemicals.

Temperature range: **-30 °C to +80 °C**

#### PACKAGING

Pieces per carton: **24 pcs**



Carton weight: **1,090 kg**

Carton dimension: **220 x 220 x 65 mm**

Cartons per pallet: **620 pcs**

Pieces per pallet: **14880 pcs**

Pallet dimensions: **100x120x220 cm**

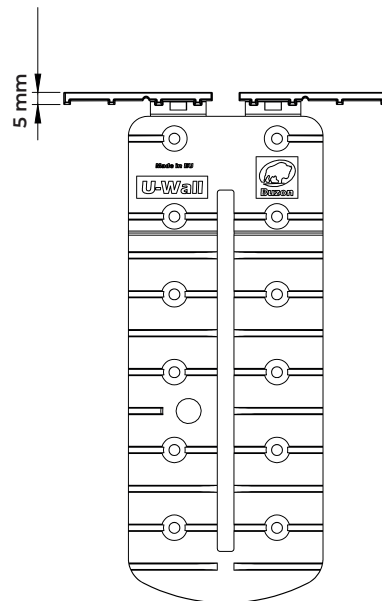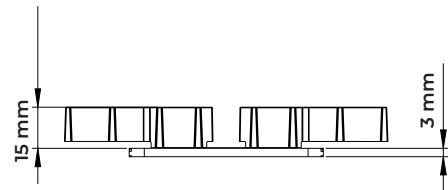

#### APPLICATIONS

Maintains a regular space (5 mm) between the paver and the wall.

Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal.

#### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.