



# **Technical Data Sheet**

U-E10-Edge Shim thickness 1mm

### **COMPONENTS**

The U-E10-Edge is composed of 1 piece.

#### **CHARACTERISTICS**

Weight: 0,026 kg Lenght: 213 mm Thickness: 1mm

#### **MATERIAL**

Material: SBR

Hardness Shore A Din 53505: 60-80 SHA

Color: Black

Density: 1,55 g/cm3

Temperature range: (-30) +/- 70 °C
Tensile Strenght Din 53504: 3 Mpa
Elongation at break DIN 53504: 250%

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range

of chemicals


# **PACKAGING**

Pieces per carton: 480 pcs Carton weight: 13 kg

Carton dimension: 250x250x250mm

Cartons per pallet: 60 pcs Pieces per pallet: 28 800 pcs

Pallet dimensions: 80 x 120 x 160 cm

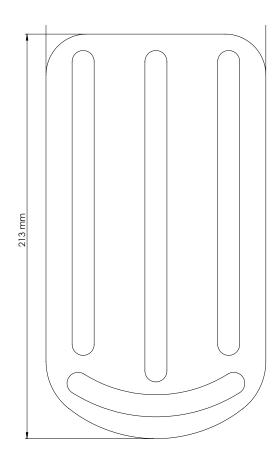



#### **APPLICATIONS**

The U-E10 Edge is a 1 mm shim. Placed on the U-Edge support, it stabilises the paver, provides additional acoustic comfort, and compensates for variations in paver thickness.

## **SAFETY INSTRUCTIONS**

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

