

## Technical Data Sheet

**U-E10 Shim thickness 1mm**

### COMPONENTS

The U-E10 is composed of 1 piece.

### CHARACTERISTICS

Weight: 0,018 kg

Diameter: 150 mm

Thickness: 1mm

### MATERIAL

Material: SBR

Hardness Shore A Din 53505: 60-80 SHA

Color: Black

Density: 1,55 g/cm<sup>3</sup>


Temperature range: (-30) +/- 70 °C

Tensile Strength Din 53504: 3 Mpa

Elongation at break DIN 53504: 250%

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

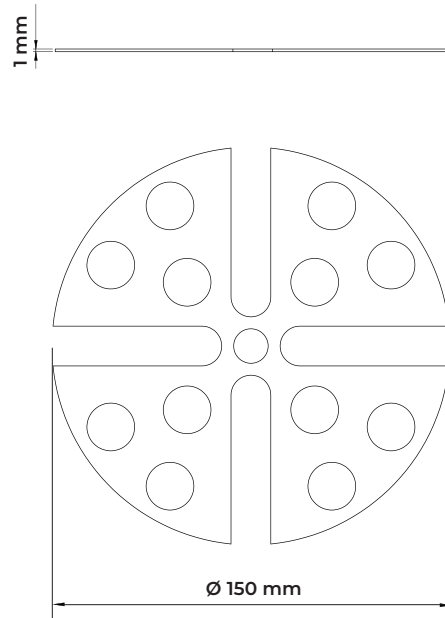

### PACKAGING

Pieces per carton: 480 pcs

Carton weight: 8,99 kg

Carton dimension: 400 x 300 x 160 mm

Cartons per pallet: 48 pcs

Pieces per pallet: 23 040 pcs

Pallet dimensions: 80 x 120 x 110 cm

### APPLICATIONS

The U-E10 leveller is a 1 mm clover-shaped shim. Placed on the Buzon pedestal, it stabilises the paver, provides additional acoustic values, and because it can be split, it compensates for variations in paver thickness.

### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This technical data sheet is for descriptive purpose only and is based on the product as on the date of publication of this information.

BPI 2025 © Copyright Buzon Pedestal International SA.

